Single Disc Salt and Sand Spreader

VSA 360 H





VSA 360 H Single Disc Salt and Sand Spreader


PUT YOUR MIND AT EASE THIS WINTER

VSA spreader is mainly intended for local municipalities, industrial sites, maintenance departments. With its large range of uses, easy maintenance and durability, this spreader will ensure your peace of mind.





HIGH-QUALITY DISTRIBUTION

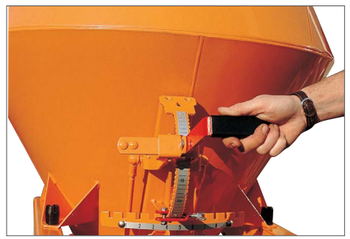


QUICK AND ACCURATE ADJUSTMENTS
The application rate is easily adjustable thanks to a moveable stop and a precisely graduated adjustment plate. A lever controls the outlet opening and closing as necessary. If needed, application can be set only to the right or left side.



ADAPTING TO THE PRODUCT
Easy adjustment of the outlet opening allows quick adaptation to spread different products. Stainless-steel outlets provide long life even in difficult conditions.



SPECIAL AGITATOR
For non-free flowing products (sand, salt, sand-salt mix), the special agitator provides an even flow of the product toward the outlets.

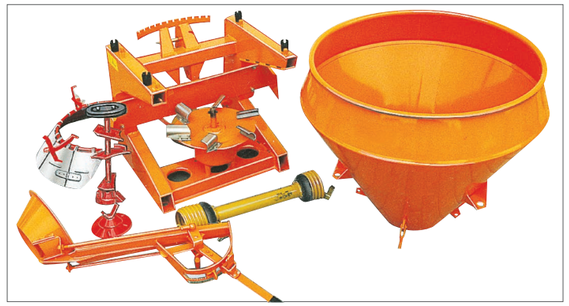

EASY MAINTENANCE
The main components of the VSA 360 H require little maintenance and can easily be disassembled for cleaning.



ADJUSTABLE DEFLECTORS
Adjustable stainless-steel deflectors provide a wide range of application widths and can be removed without tools.



HOPPER PROTECTION
A sturdy grate, provided as standard, keeps rocks, concrete, clods and other foreign objects out to protect the bottom of the hopper.



HOPPER WALLS
The hopper walls have steep angles to create an even flow and reduce the likelihood of material buildup.

SINGLE DISC SALT AND SAND SPREADER VSA 360 H



STAINLESS-STEEL PARTS
Winter conditions can be very demanding for machines. The high-quality manufacturing, using many stainless-steel parts, ensures a long service life.



SAFETY FEATURE
Road lighting is available for safe transport.



CUSTOM-MADE CONTROLS
Several remote controls are available. Choose from 2 cable, electric or hydraulic options to suit your needs.


Technical specifications

	VSA 360 H
Spreading width	2'11" - 29'6" (0.88 - 9.00 m)
Hopper capacity	12.7 cu ft (360 L)
Maximum gross payload, approx.	1,100 lbs (500 kg)
Hopper opening width	32.7" (83 cm)
Hitch	3-point, Cat. 1
Hopper sieve	Standard
Hydraulic drive (requires 5 to 10 GPM)	Standard
Sand/salt agitator	Standard
Machine net weight	254 lbs (115 kg)

MyKUHN

THE LINK TO MY SUCCESS

MyKUHN is your online customer portal where you can access machine operator's manuals, parts catalog and more! The site is available on computer, phone or tablet, so you can access your fleet's information anywhere around the farm. Create an account and register your KUHN equipment today.

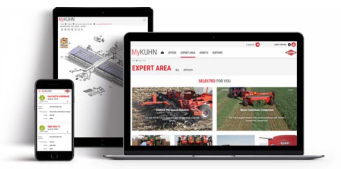

KUHN NORTH AMERICA, INC. | Corporate Headquarters | 1501 West Seventh Avenue - Brodhead, WI 53520

Information given in this document is only for informational purposes and is non-contractual. Our machines are in compliance with North American safety standards. In our literature, and for improved illustration of certain details, some safety devices may not be in operating position. When operating these machines, these devices must be operated in accordance with the requirements indicated in the operator's manuals and assembly manuals. We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

Printed in USA 706479US 0624 Copyright 2024 Kuhn North America, Inc.